




500 bar bundle

Hydrogen storage





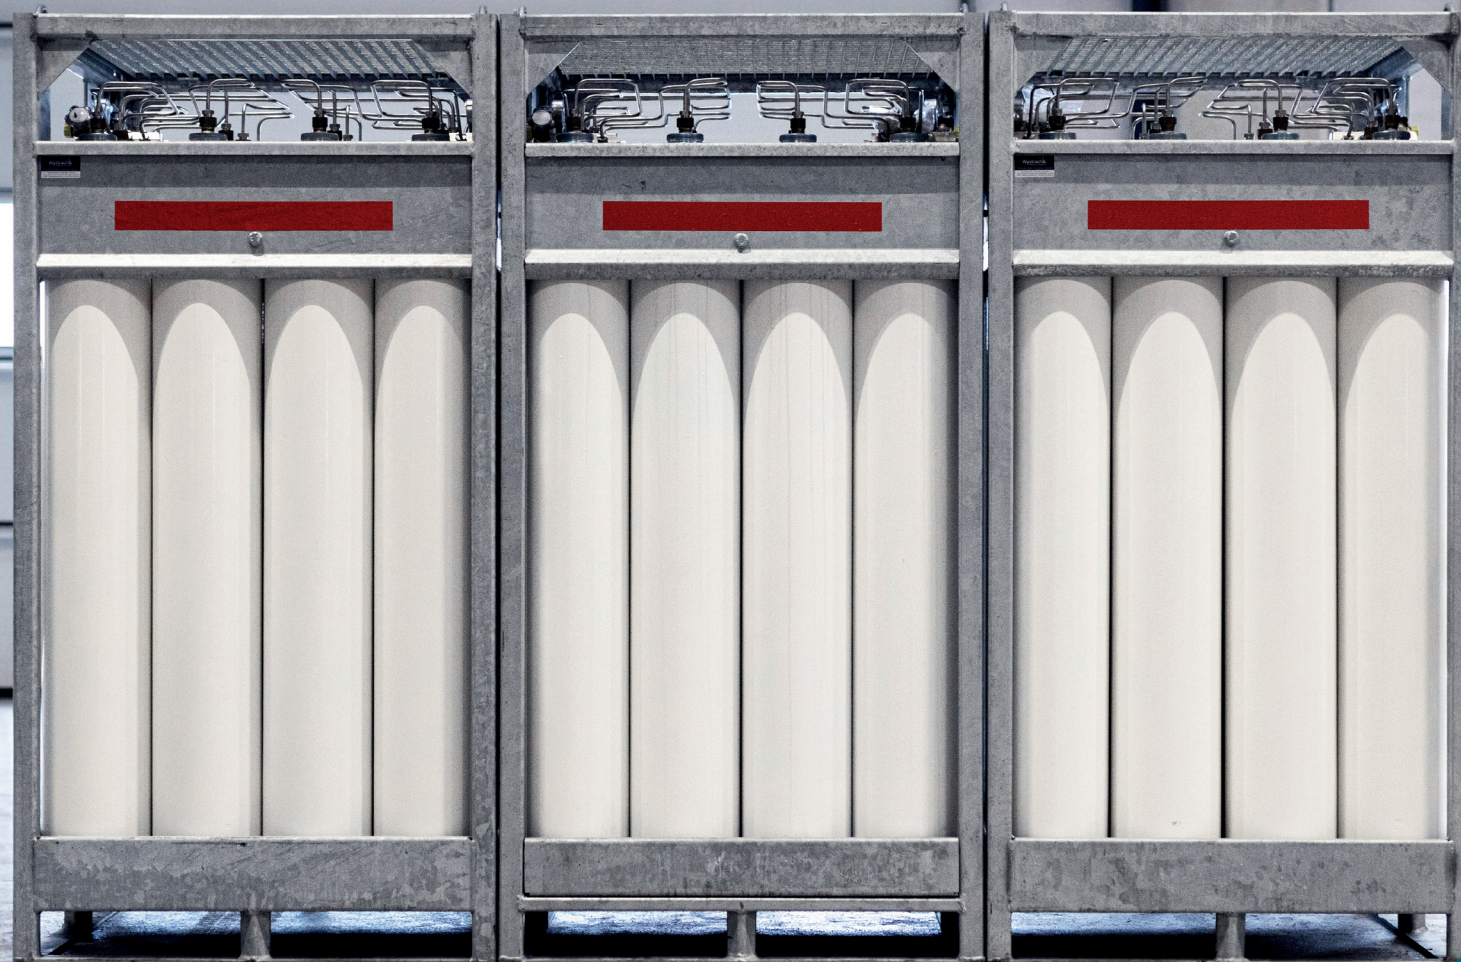

500 bar bundle Hydrogen storage

- 500 bar working pressure
- 600 L capacity
- Fully assembled
- Handling by fork lift and crane
- Extra fixing points for safety shipment
- Each piping and valve parts integrated and protected

Standard/options	Approval	Bundle 600/500
Standard	ADR	X
Standard	TPED	X
Standard	PED	500 bar
Standard	Regulation	EN ISO 10961
Standard	Cylinder	Type 1
Standard	Cylinder valve	Brass
Standard	Manifold	Stainless steel
Standard	Filling connection	M20X1,5LH
Standart	Gauge filling pressure	X
Option 1	Gauge discharging pressure	X
Option 1	Pressure regulator	500/200
Option 1	Safety valve	PED

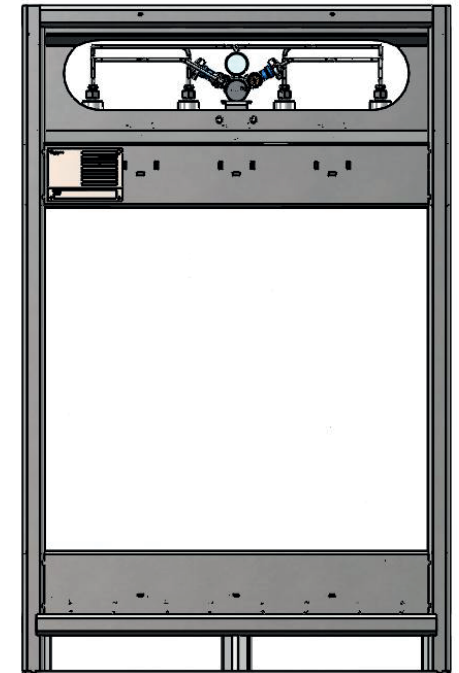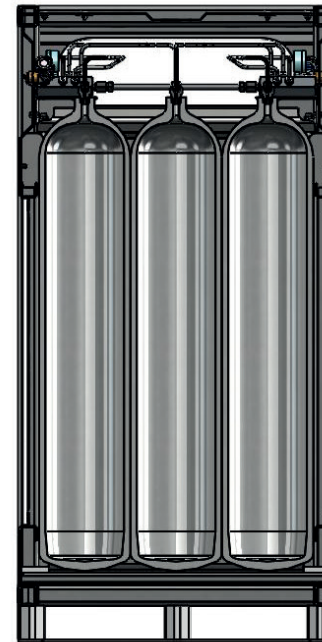

Description	Cylinder size	Cylinder/Rack	Bundle capacity	Working pressure	Test pressure	Weight
	L		L	bar	bar	kg
Bundle 600/500	50	12	600	500	787	2,500